



MOTOR TYPE: 42H3150-41-6AIP

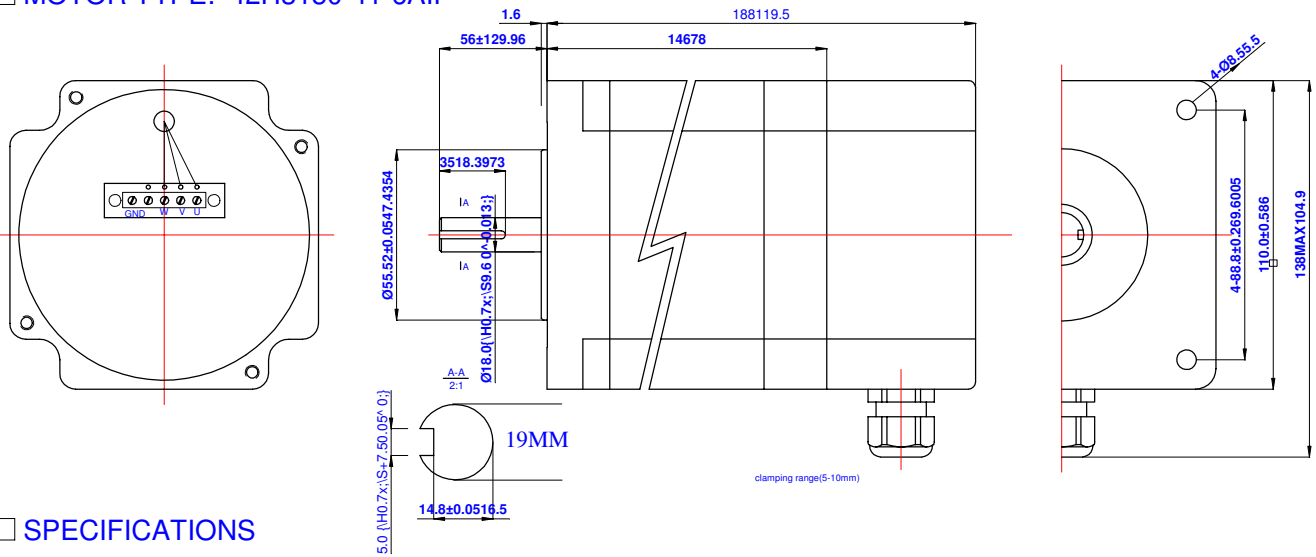

SPECIFICATIONS

| | |
|------------------|------------------------|
| PHASE | 3 PHASE |
| STEP ANGLE | 1.2±5% %/STEP |
| INERTIA | 11000 gcm ² |
| CURRENT OF DRIVE | 4.1 A/PHASE |
| RESISTANCE | 3.4 ±10% Ω/PHASE |
| INDUCTANCE | 23 ±20% mH/PHASE |
| RUN TORQUE(MAX) | 14.0 NCM |
| DETENT TORQUE | 0.6 N.m |
| INSULATION CLASS | B |

COLORS OF LEAD WIRES



MSM2H3150-41-6AIP
2.4A/phase 12.0N.m
MAR-EL MAKINA
2307XXXXX

www.marelmakina.com